


Encompass[®] 6 Multiprotocol Reader

Features

- ▶ Compatible with multiple industry standard protocols
- ▶ Multiprotocol operation at highway speeds
- ▶ Read/write
- ▶ Mutual authentication and data encryption for higher security applications
- ▶ Fully integrated reader and radio frequency module
- ▶ 915 MHz RF band operation
- ▶ Software-controlled RF power
- ▶ Ethernet and RS-232 communications
- ▶ Mounting up to 85 feet (26 meters) from antenna
- ▶ Ability to synchronize with other Encompass[®] 6 Multiprotocol Readers for multiple lane/multiple reader environments using either wired or GPS-based wireless synchronization
- ▶ Capable of buffering up to 500,000 tag transactions in non-volatile memory

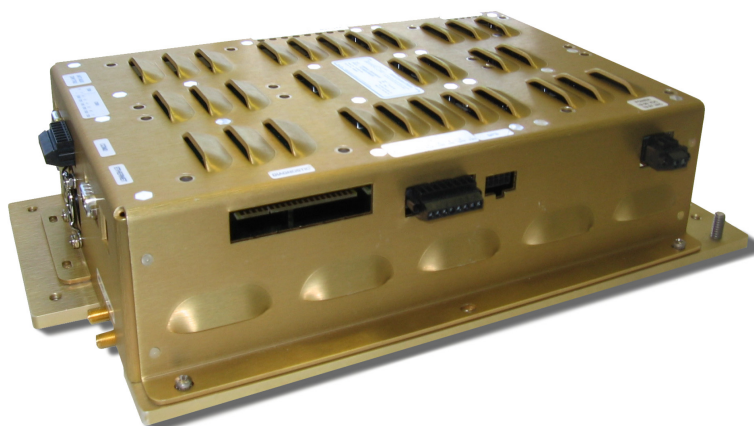

TransCore's Encompass[®] 6 Multiprotocol Reader is an integrated high-speed, multiprotocol 915 MHz radio frequency identification (RFID) reader system that includes an RF transceiver board and processor in a single assembly. The read/write Multiprotocol Reader is ideal for high-speed, multi-lane installations with a requirement to read or write to two tag protocols or to provide a migration path from an existing tag protocol.

The Encompass 6 Multiprotocol Reader is capable of supporting any of the following protocols in a given installation:

- ▶ American Trucking Associations (ATA), full-frame and half-frame (read-only)
- ▶ California Title 21 (read-only)
- ▶ eGo[®] (read/write) — fully compliant with ANSI NCITS 256:2001 and ISO 18000-6B standards
- ▶ Interagency Group (IAG/TDM) (read/write)
- ▶ Super eGo (SeGo) (read/write) — a superset of the eGo protocol
- ▶ ASTM v6 (read/write)
- ▶ TransCore IT2200 (read/write)

Where multiple tag protocols are used in the same installation, the Multiprotocol Reader is capable of supporting any two of the above protocols.

The Encompass 6 Multiprotocol Reader is also suitable for a wide variety of automatic vehicle identification transportation applications, including electronic tolling, open road tolling, electronic vehicle registration, parking, and rail applications.

The Encompass 6 Multiprotocol Reader can be integrated into an onsite lane controller or a NEMA enclosure. The Multiprotocol Reader transmits and receives signals through a single antenna.

Encompass® 6 Multiprotocol Reader

COMMUNICATIONS

Frequency Range

Downlink: 911.75 to 919.75 MHz adjustable in 0.25 MHz steps

Uplink: 902.25 to 903.75 MHz and 910.00 to 921.50 MHz adjustable in 0.25 MHz steps

Actual downlink frequency range is protocol-dependent.

The above frequencies are in the location and monitoring service (LMS) band.

RF Control

Programmable with host command

Communications Interface

Ethernet, RS-232

Antenna Interface

50-ohm SMA connector

Read/Write Range

Read performance varies depending on operating protocol, tag and reader configuration, and environment.

POWER REQUIREMENTS

Input Supply Voltages

DC: 19–30V DC

AC: 19–27V RMS @ 47–63 Hz

Input Power

DC or AC: 40 watts maximum

In-rush Current

8 amps max., duration £25 ms

PHYSICAL

Dimensions

Multiprotocol Reader Size (reader only):

14.5 x 8.6 x 3.0 in. (36.8 x 21.8 x 7.6 cm)

Multiprotocol Reader Weight

(reader only): 6.5 lb (2.9 kg)

NEMA Enclosure Size:

18.6 x 18.0 x 10.6 in. (47.2 x 45.7 x 25.4 cm)

NEMA Enclosure Mounting Plate Size:

22.0 x 16.7 x 0.10 in. (55.8 x 42.4 x 0.25 cm)

Encompass 6 Weight (reader, NEMA enclosure, and mounting plate): 32.0 lb (14.5 kg)

Mounting Location

In lane controller or NEMA enclosure

ENVIRONMENTAL

Operating Temperature

Encompass 6: -40°F to +158°F (-40°C to +70°C), integrated unit

Encompass 6 (in NEMA enclosure):

-40°F to +131°F (-40°C to +55°C)

Storage Temperature

Encompass 6: -40°F to +185°F (-40°C to +85°C)

Humidity

95% non-condensing

Vibration (no NEMA enclosure) (sinusoidal)

5 to 20 Hz, 0.1-inch peak-to-peak

20-200 Hz, 2 G peak

Vibration (no NEMA enclosure) (random)

10 to 500 Hz, 2 G_{rms}

Vibration (in NEMA enclosure) (random)

10 to 500 Hz, 1 G_{rms}

Shock (no NEMA enclosure)

10 G sawtooth pulse at 11 ms duration

Shock (in NEMA enclosure)

5 G sawtooth pulse at 10 ms duration

LICENSING

Equipment License

The user is required to obtain a Part 90 site license from the FCC to operate the unit in the United States. Access the FCC Web site at www.wireless.fcc.gov/uls for more information.

FCC ID: FIHMPI6000A

Users in all countries should check with the appropriate local authorities for licensing requirements.

COMPLIANCE

RF Interference

Units have been tested and are verified to Part 15 of the FCC rules for a Class A digital device.

Standards

The Encompass 6 Multiprotocol Reader complies with the requirements of Standard for Information Technology and Telecommunications Equipment (UL60950 Third Edition).

The Encompass 6 Multiprotocol Reader meets the limits established by RSS-137, Location and Monitoring Service (902-928 MHz), of the Industry Canada Standards.

OPTIONS

Enclosure

NEMA 4X enclosure

Wireless Reader Synchronization

GPS device assembly

Multiple Lane Operation

Antenna multiplexing

External Device Control

Digital input/output assembly

TRAINING

Installation, operation, and maintenance training for TransCore authorized dealers is available through TransCore. For details, contact TransCore.

DOCUMENTATION

Encompass® 6 Multiprotocol Reader System Guide

Encompass® 6 Multiprotocol Reader Quick Reference Card

For more information:

Call **800.923.4824** (Sales Support) **505.856.8007** (Technical Support)

© 2005-2016 Transcore LP. All rights reserved. TRANSCORE is a registered trademark and is used under license. All other trademarks listed are the property of their respective owners. Contents subject to change. Printed in the U.S.A.

411833-019 - 06/16

TRANSCORE
transcore.com