

J2 Switchable

TDM Transponder

TransCore's J2 Switchable TDM Transponder is a 915-MHz battery-powered radio frequency identification (RFID) transponder that offers the flexibility of switching between two selectable configurations. It is ideal for high-speed, high-reliability applications.


The two-position switch can be configured to identify different tolling configurations as determined by the issuing agency. An audio indicator beeps when the switch is moved from position 1 to position 2.

The J2 Switchable works for basic IAG operations and includes the capability to detect and prevent transponder tampering, cloning, and spoofing.

The J2 Switchable TDM Transponder is constructed of highly durable, impact resistant, molded plastic. The non-replaceable internal battery provides years of maintenance-free service.

The J2 Switchable TDM Transponder is designed for mounting to a vehicle's interior windshield with suction cups or hook-and-loop fastener strips for easy installation and removal.

Other customizable options include printing on the case, molded insert on the front of the case, a choice of case colors, and laser-etching.

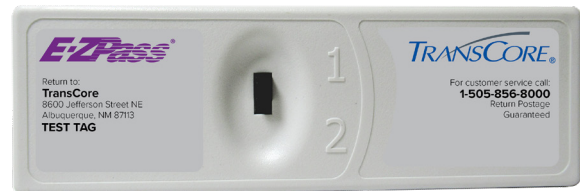

Features

- ▶ High-speed, high-performance reading and writing
- ▶ Capability to detect and prevent transponder tampering, cloning, and spoofing
- ▶ Two-position switch with audio indicator, configurable by the issuing agency
- ▶ Non-replaceable internal battery with a 7.5-year design life
- ▶ Mounts to interior windshield with suction cups or hook-and-loop fastener strips
- ▶ Impact resistant, molded plastic case available in six colors: blue, white, yellow, green, orange, and gray
- ▶ Custom printing available on front and back of case

Applications

- ▶ Electronic Toll Collection
- ▶ Traffic Management
- ▶ HOV/HOT

J2 Switchable TDM Transponder

COMMUNICATIONS

Transmit Frequency Range
915 MHz (nominal center)

Trigger/Receive Frequency
915.75 MHz (nominal center)

Polarization
Linear, horizontal

SOFTWARE FEATURES

Data Memory
256 bits
IAG-TDM

Data Rate
500 kb/s Manchester

Data Format
Manchester keyed carrier

Error Checking
16-bit cyclic redundancy check (CRC)

POWER

Power Source
Internal lithium battery

LIFE EXPECTANCY

Service Life
7.5-year design life

PHYSICAL CHARACTERISTICS

Weight
1.75 oz. (49.61 g)

Dimensions
4.35 x 1.42 x 0.56 in (11.05 x 3.61 x 0.42 cm)

Color
Six colors: white, blue, orange, yellow, green, and gray

Case
Plastic cases are UV stable and are not affected by temperature extremes or severe conditions typical of this operating environment. Shock and vibration resistant

Mounting Surface
Interior: Non-metallic windshield

Audio Indicator
An audio indicator beeps when the switch is moved from position 1 to position 2.

Mounting Method
Suction cups or hook-and-loop fastener strips

ENVIRONMENTAL

Operating Temperature
-40°F to +185°F (-40°C to +85°C)

Humidity
100% condensing

REGULATORY

Complies with Part 15 of the FCC rules
FCC ID: FIH051132B
IC ID: 1584A-FIH051132B

COMPATIBILITY

TDM

MODEL PART NUMBERS

13-7821-NNN

For more information:

Sales Support
800.923.4824

Technical Support
505.856.8007

[transcore.com](https://www.transcore.com)

© 2023 TransCore LP. All rights reserved. TRANSCORE is a registered trademark and is used under license. All other trademarks listed are the property of their respective owners. Contents are subject to change.

16-0174-002 Rev A 6/2023

TRANSCORE
Trusted Transportation Solutions