


AT5720 Check Tag

Features

- ▶ Status-check capability
- ▶ Check tag control functions incorporated into all AI1200 readers
- ▶ Simple installation with external cable for connection to reader or RF module

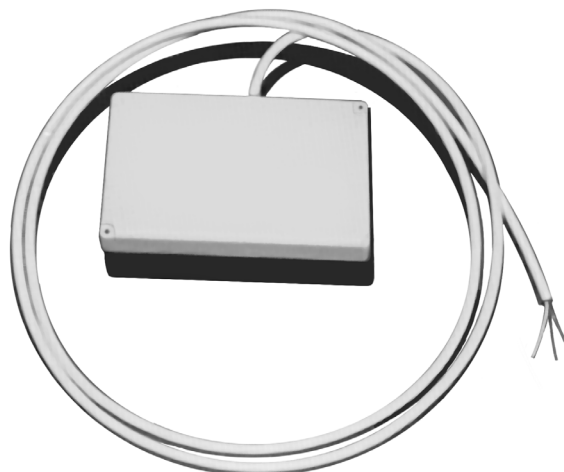

The AT5720 Check Tag provides a means by which the user may perform end-to-end status checks of Amtech® technology systems. The AT5720 Check Tag is installed within or near each antenna connected to a reader.

The AT5720 Check Tag obtains power and control signals directly from the reader or radio frequency (RF) module and is turned on at prescribed intervals controlled by the reader or host computer. When the AT5720 Check Tag is turned on, the system reads its ID, as with any other tag. Failure to detect the check tag ID alerts the user to possible failure within the system.

All Amtech-brand AI1200 Reader firmware versions higher than Version 2.3 incorporate AT5720 Check Tag control functions. The #8100-series firmware commands enable the user to control system tests, set the time intervals for controlling one or two AT5720 Check Tags, and define each AT5720 Check Tag signature and address for diagnostic purposes. Once set, the AT5720 Check Tag signatures and addresses are saved in nonvolatile memory so they are retained even through interruptions in power.

The AT5720 Check Tag has an external cable for connection to the reader or RF module via three wires: power, ground, and check tag control. Selected antennas may be ordered with the AT5720 Check Tag already installed.

AT5720 Check Tag

COMMUNICATIONS

Frequency Range

902 to 928 MHz

2400 to 2500 MHz

Working Range (typical)

902 to 928 MHz (free space): 80 ft (24 m)

902 to 928 MHz (metal mount): 56 ft (17 m)

2400 to 2500 MHz (free space): 30 ft (9 m)

2400 to 2500 MHz (metal mount): 70 ft (21 m)

Range depends on system parameters.

Working Range (maximum)

902 to 928 MHz (free space): 160 ft (49 m)

2400 to 2500 MHz (free space): 40 ft (12 m)

2400 to 2500 MHz (metal mount): 70 ft (21 m)

Polarization

Parallel with longer side

POWER REQUIREMENTS

Power Source

7 to 30V DC (typically from AI1200 Reader)

PHYSICAL

Dimensions

Size: 3.6 x 2.3 x 0.4 in. (9.2 x 5.9 x 1.1 cm)

Weight: 2.5 oz (70 g)

Case

Weatherproof, sealed

Mounting Surface

Metallic or free space

ENVIRONMENTAL

Operating Temperature

-40°F to +185°F (-40°C to +85°C)

OPTIONS

Custom Colors

The AT5720 Check Tag may be custom-ordered in a range of colors. Special conditions may apply. Contact your TransCore representative for information.

Installation in Antennas

Selected antennas may be ordered with the AT5720 Check Tag installed.

For more information:

Call **800.923.4824** (Sales Support) **505.856.8007** (Technical Support)

© 1998 -2016 TransCore LP. All rights reserved. TRANSCORE is a registered trademark and is used under license. All other trademarks are the property of their respective owners. Contents subject to change. Printed in the U.S.A.

411095-010 - 06/16

TRANSCORE
transcore.com